

प्रति.

.....
.....
.....

दरपत्रक सुचना क्र.04/एमपीजीआय/2026-27

विषय : म.आ.वि.वि नाशिक अंतर्गत सुरु झालेल्या म.प.वै.शि.सं.संस्था, नाशिक येथील अधिष्ठाता कार्यालय आणि विद्यार्थी वसतीगृह येथे CCTV पुरवठा व Installation साठी दरपत्रके पुरवणे.

..

महोदय,

उपरोक्त विषयाच्या अनुषंगाने कळविण्यात येते की, महाराष्ट्र आरोग्य विज्ञान विद्यापीठांतर्गत “महाराष्ट्र पदव्युत्तर वैद्यकीय शिक्षण व संशोधन संस्था, नाशिक.” ही संस्था सध्या जिल्हा सामान्य रुग्णालय, नाशिक यांचे आवारात कार्यरत आहे. सदर संस्थेच्या अधिष्ठाता कार्यालय आणि विद्यार्थी वसतीगृहासाठी सोबत तक्त्यात नमुद केल्याप्रमाणे CCTV यंत्रणेची तात्काळ आवश्यकता असल्याकारणाने विविध पुरवठादारांकडून दरपत्रके मागविण्यात येत आहे.

पुरवठा करावयाच्या वस्तुंचा तपशिल व संख्या इत्यादींची माहिती सोबतच्या तक्त्यात नमुद करण्यात आलेली आहे. विनंती करण्यात येते की “अधिष्ठाता, महाराष्ट्र वैद्यकीय शिक्षण व संशोधन संस्था, मआविवि नाशिक - जिल्हा सामान्य रुग्णालय, नाशिक यांचे आवार, कान्हेरे मैदाना समोर त्र्यंबकरोड, नाशिक.” यांचे नावाने/पत्त्यावर दि. 06/07/2026 वेळ दुपारी 4.00, वाजेपावेतो सिलबंद दरपत्रके (तांत्रिक लिफाफा व व्यापारी लिफाफा) असे. दोन स्वतंत्र लिफाफे एक लिफाफ्यात घालून पाठवावित. दरपत्रकाच्या लिफाफ्यावर “म.प.वै.शि.व सं.संस्था नाशिक.” करीता CCTV पुरवठा आणि Installation साठीचे दरपत्रक असे नमुद करण्यात यावे. शक्य झाल्यास दि.06/07/2026 रोजी सायं 4.15

वाजता उपस्थित पुरवठेदारांसमोर दरपत्रके उपडण्यात येतील अथवा दरपत्रक उपडण्यासाठीची तारीख व वेळ पुरवठेदारांस दुरुध्वनीद्वारे कळविण्यात येईल. दरपत्रककर्ताने साहित्याचे दर हे वाहातुकीसह व सर्व करांसहीत (GST) तसेच, म.प.वै.शि.व सं. संस्था नाशिक (जिल्हा सामान्य रुग्णालय आवार, नाशिक) या ठिकाणी पोहोच करून बसवणे आणि Testing करून कार्यान्वीत करण्याचे असावेत. Installation, testing चा स्वतंत्र दर दरपत्रकावर नमूद करावा. दरपत्रकावर आपला जीएसटी क्रमांक व दिनांक नमूद करण्यात यावा. (GST नोंदणी बंधनकारक आहे.)

पुरवठ्याच्या अटी व शर्ती :-

- 1) एका पुरवठेदाराने एकच दरपत्रक सादर करावे
- 2) दरपत्रक फर्मच्या लेटरहेड वर किंवा लेटर हेड संगणकीय असल्यास फर्मच्या अधिकृत मोहर/शिक्का उमटवून सादर करावे.
- 3) दरपत्रक हे तांत्रिक निविदा व व्यापारी निविदा अशी दोन वेगवेगळी पाकिटे एका मोठ्या पाकिटात घालून वर नमूद केलेल्या सुचनेनुसार व पत्त्यावर विहित मुदतीत पोहोच करावी. मुदतीनंतर आलेली दरपत्रके विचारात घेतली जाणार नाहीत याची नोंद घ्यावी.
- 4) दरपत्रकासोबत पुरवठेदाराने स्वतःचे/फर्मचे पॅनकार्ड, आधारकार्ड, शॉप अॅक्ट लयसन्स, संबंधित वस्तुचा पुरवठेदार/अधिकृत विक्रेता असल्याचे प्रमाणपत्र (असल्यास), लावावे व पाकीट क्र.1 मध्ये ठेवावे.
- 5) पुरवठेदाराने वस्तुचे दर हे वर तक्त्यात नमूद केल्याप्रमाणे सर्वकार/ जीएसटी सह नमूद करावे तसेच जीएसटी लागू नसल्यास त्याबाबत लेटरहेडवर प्रमाणित करून घावे दरपत्रक पाकीट क्र. 2 मध्ये ठेवावे आणि दोन्ही पाकीटे पाकीट क्र.3 मध्ये घालून सिल करून सादर करावी.
- 6) CCTV आणि संबंधित उपकरणे पुरवठा करावयाच्या वस्तु व उच्च दर्जाच्या (Branded) आणि भारतीय बनावटीच्या (Made in Bharat) असाव्यात.
- 7) वस्तुचा दर्जा व पुरवठेदाराच्या शर्ती तपासून निर्णय होणार असल्याकारणाने निम्न दरपत्रक धारकास पुरवठा आदेश देणे बंधनकारक असणार नाही. वस्तुचा दर्जा योग्य नसल्यास निम्न दरपत्रक नाकारण्याचा अधिकार म.प.वै.शि.व सं. संस्था, मआविवि नाशिक. राखून ठेवत आहे.

- 8) CCTV व संबधीत यंत्रणा On Site Installation करायची आहे यास्तव पुरवठादाराने अधीष्ठाता कार्यालय व परीसर आणि विद्यार्थी वस्तीगृह व परीसर याची प्रत्यक्ष पहाणी करुन, अंदाज घेऊनच दरपत्रक सादर करावे, एकदा सादर केलेल्या दरपत्रकात नंतर बदल करता येणार नाही.
- 9) CCTV आणि संबधीत यंत्रणा पुरवठ्यासाठी पुरवठादारास कोणताही अग्रिम देण्यात येणार नाही.
- 10) सोबतच्या तक्त्यातील वस्तु, संख्या यात कमी जास्त झाल्यास त्याप्रमाणे देयक अदा केले जाईल.
- 11) दरपत्रकातील CCTV व संबधीत यंत्रणा म.प.वै.शि.व. सं. संस्था मआविवि, नाशिक या ठिकाणी पोच करण्यासह दर नमुद करावे. स्वतंत्र वाहतुकीचे दर नमुद करु नये. तसेच Installation, Testing व कार्यान्वीत करणे हि कामे पुरवठादाराने करायची आहेत, यासाठी स्वतंत्र चार्जेस दरपत्रकात स्पष्ट नमुद करावेत.
- 12) पुरवठ्याच्या देयकाची अदायगी ही बँक खात्याची पुर्ण माहिती सादर करावी. (क्रॉस कॅन्सल चेक)
- 13) वरील दरपत्रक प्रक्रियेत बदल करण्याचा व रदद करण्याचा म.प.वै.शि.व सं. संस्था, मआविवि, नाशिक राखून ठेवत आहे.
- 14) पुरवठादारांस व म.प.वै.शि.व सं.संस्था, मआविवि नाशिक, यांच्यात पुरवठ्याबाबत काही वाद झाल्यास तो नाशिक जिल्ह्यांच्या न्याय कक्षेत येईल.


अधिष्ठाता

अतिरिक्त कार्यभार

(म.प.वै.शि.व सं.संस्था नाशिक)

Dean

**Maharashtra Post Graduate Institute of
Medical Education & Research, PMS Nashik**

List of Required CCTV instruments and fittings -

Sr.no	Item	Specifications	Quantity
01	DVR 8 channel (30 days back up)	as per enclosed	01
02	NVR 8 channel (30 days backup)	as per enclosed	01
02	Dome camera 5 MP	as per enclosed	08
03	Bullet camera 5 MP	as per enclosed	08
04	Hard Disk 4TB surveillance(30 days backup)	as per enclosed	02
05	Power supply	as per enclosed	as per actual measurement
06	Wall mount Rack	as per enclosed	02
07	Wiring and UTP cable	as per enclosed	as per actual measurement
08	Monitor	as per enclosed	02
09	Misc fittings and items not covered above	as per enclosed	as per actual measurement

* Requirements shown above are indicative, may vary as per actual requirement.

*Suppliers are advised to make site visit, get actual requirement of wiring and other items before filing the quotation, no correction /alteration after submission of quotation shall be permitted.

Please Send your Quotation By Post or in Person on our above address within 08 days from the date of this calling quotation letter. subject to terms & condition given overleaf.



DEAN

(Addl. Charge)

MPGI, MUHS, Nashik.

Dean

**Maharashtra Post Graduate Institute of
Medical Education & Research MUHS Nashik**

Feature	Specification
Image Sensor	1/2.7" 5MP PS CMOS (0.9407cm)
Minimum Illumination	0.02 Lux/F2.0, 30IRE, 0 Lux IR on
Shutter Speed	PAL: 1/25~1/100000s, NTSC: 1/30~1/100000s
Lens	3.6mm (2.8mm optional)
Lens Type	Fixed lens/ Fixed Iris
S/N Ratio	>65dB
Resolution	5MP (2880 × 1620), 4MP (2560 × 1440), 1080P (1920 × 1080), 960H (960 × 576/960 × 480)
Mount Type	M12
Max. Aperture	F2.0
Angle of View	3.6 mm: 104° × 88° × 46° (D × H × V), 2.8 mm: 125° × 106° × 56° (D × H × V)
Close Focus Distance	2.8 mm: 0.8m/3.6mm: 1.2m
DORI Distance	2.8mm: 56.0m (Detect) 22.4m (Observe) 11.2m (Recognize) 5.6m (Identify) 3.6mm: 80.0m (Detect) 32m (Observe) 16m (Recognize) 8m (Identify)
Back Light Compensation	BLC/HLC/DWDR
White Balance	Auto/ Manual
Video Streaming	CVI: PAL: 5MP@25fps, 4MP@25fps, 1080P@25fps, NTSC: 5MP@25fps, 4MP@30fps, 1080P@30fps, AHD: PAL: 4MP@25fps, NTSC: 4MP@30fps, TVI: PAL: 4MP@25fps, NTSC: 4MP@30fps, CVBS: 960H
Video Output	Video output choices of CVI/TVI/AHD/CVBS by one BNC port
ICR	Auto (ICR)/Manual
IR	IR Range of 30 Mtr.



*Product casing and specifications are subject to change without prior notice.

Feature	Specification
Gain Control	AGC
OSD Menu	Multi-language
Mirror	Off/On
Privacy Masking	Off / On (8 area, rectangle)
Audio	Built-In Mic
Smart IR	Yes
Casing	Plastic
Weatherproof Standard	IP67
Storage Temperature	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 95% RH
Operating Temperature	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 95% RH
Power Source	12V DC ±30%
Power Consumption	Max 3.7W (12V DC, IR on)
Dimension	69.8 mm × 69.8 mm × 149.3 mm (2.75" × 2.75" × 5.88")
Weight	0.15Kg



*Product casing and specifications are subject to change without prior notice

5MP IR Dome Camera - 30Mtr.

Feature	Specification
Image Sensor	1/3" 5MP CMOS Image Sensor (0.84667 centimeters)
Minimum Illumination	0.02 lux@F2.0 (Color, 30 IRE), 0.002 lux@F2.0 (B/W, 30 IRE), 0 lux (IR on)
Effective Pixels	2880 (H) × 1620 (V)
Angle Adjustment	Pan: 0°-360°, Tilt: 0°-78°, Rotation: 0°-360°
Shutter Speed	PAL: 1/25 s-1/100,000 s, NTSC: 1/30 s-1/100,000 s
White Balance	Auto, Manual
Lens Type	Fixed-focal
Max. Aperture	F2.0
Lens Mount	M12
Close Focus Distance	1.4 m
DORI Distance	Lens 3.6mm: 79.4 m (Detect), 31.8 m (Observe), 15.9 m (Recognize), 7.9 m (Identify)
Gain Control(AGC)	Auto
Lens	3.6mm Fixed Lens
Angle of View	H: 74°, V: 41°, D: 89°
S/N Ratio	>65 dB
Back Light Compensation	BLC, DWDR
Video Output	Video output choices of CVI/TVI/AHD/CVBS by one BNC port
Resolution	5M (2880 × 1620), 4M (2560 × 1440), 1080p (1920 × 1080)
Frame Rate	CVI: PAL: 5M@25 fps, 5M@12.5 fps, 4M@25 fps, 1080p@25 fps NTSC: 5M@25 fps, 5M@10 fps, 4M@30 fps, 1080p@30 fps AHD: PAL: 4M@25 fps NTSC: 4M@30 fps TVI: PAL: 4M@25 fps NTSC: 4M@30 fps
Noise Reduction	2D DNR
Day/Night	Auto(ICR)/Color/B/W
IR Control	Auto, Manual
Audio	Built-in Mic

CE FCC RoHS Onvif

*Product testing and specifications are subject to change without prior notice

16 Channel Power Supply

DC Voltage (Selected by switch)	12V
Rated Current	8A
Current Range	0~8A
Rated Power	96W
Ripple & Noise (max.)	120mVp-p
Voltage Range	11.4~12.6V
Line Regulation	±1.0%
Load Regulation	±5.0%
Setup, Rise time	2500ms, 15ms at full load
Hold Up Time (Typ.)	35ms at full load
Voltage Range Input	200~240V AC
Frequency Range	47~63HZ
Efficiency (Typ.)	86%
AC Current (Typ.)	2A/220VAC
Inrush Current (Typ.)	Cold Start: 50A/220V AC
Leakage Current	<2mA / 240V AC
Over Load	110~200% rated output power, Protection type: Shut down O/P, recovers automatically
Over Current	110~200% rated output current, Protection type: Shut down O/P, re-power on to recover
Short circuit	Protection type: Shut down O/P, recovers automatically after fault removed
Working Temperature	-20 ~ +45°C
Working Humidity	20 ~ 90% RH Non-condensing
Storage Temperature	-20 ~ +85°C
Storage Humidity	10 ~ 95% RH
Temperature Coefficient	±0.03%/°C (0~50°C)



*Product casing and specifications are subject to change without prior notice

16 Channel Power Supply

- 16 Channel Output
- With Cable Compensation Switch
- LED Indicator for Each Channel
- Built-in EMI Filter to Nullify Interference
- Cooling by Free Air Convection
- Built-in Constant Current Limiting Circuit
- 100% full Load Built-in test
- Plastic Housing



About CP PLUS

The brand that is on its way to lead the world when it comes to the security and surveillance industry, CP PLUS, keeps bombarding the market with the most reliable range of products that have been designed carefully and methodically to automate the whole surveillance and security process, no matter how big your premises are.

It was the initiative to help the public in the area where they are the most vulnerable and to empower the sense of safety in our hearts that had conceptualized CP PLUS. And embarking on its mission to make the world a safer and more secure place has taken the brand's journey to unprecedented levels even when compared to international competitors.

Feature	Specification
IR	IR Range of 30 Mtr.
IR Mode	Smart IR
Iris Control	Fixed
IR Number	2 IR
Power Source	12 VDC $\pm$ 30%
Power Consumption	Max 2.2 W (12 VDC, IR on)
Anti-corrosion Level	Basic Protection
Operating Temperature	-40°C to +55°C (-40°F to +131°F)
Operating Humidity	<95% (RH), non-condensing
Storage Temperature	-40 °C to +55 °C (-40 °F to +131 °F)
Storage Humidity	<95% (RH), non-condensing
Casing	Plastic
Dimension	85.0mm x 77.1mm
Weight	0.11 kg


CE FC RoHS ONVIF

*Product casing and specifications are subject to change without prior notice

Drive Size	4 TB
Hard Disk Description	Mechanical Hard Disk
Hard Drive Interface	Serial ATA
Hard Disk Rotational Speed	5900 RPM
Are Batteries Included	No
Included Components	Seagate Skyhawk 4 TB Surveillance Internal Hard Drive

4U DVR/NVR Wall Mount Rack

- Basic frame: CRCA (MS SHEET)
- Construction: Welded
- Cable Entry/Exit provision at Top and Bottom with Rubber at Edges
- Front Door: Acrylic fiber Glass with Lock and Key

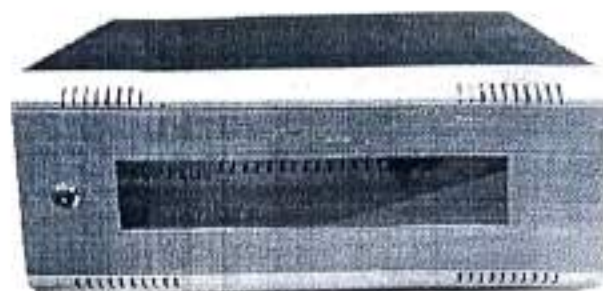

About CP PLUS

The brand that is on its way to lead the world when it comes to the security and surveillance industry, CP PLUS, keeps bombarding the market with the most reliable range of products that have been designed carefully and methodically to automate the whole surveillance and security process, no matter how big your premises are.

It was the initiative to help the public in the area where they are the most vulnerable and to empower the sense of safety in our hearts that had conceptualized CP PLUS. And embarking on its mission to make the world a safer and more secure place has taken the brand's journey to unprecedented levels even when compared to international competitors.

Model No.	Description	Width	Depth
CP-HA-RK5035VW-4U-TP	Wall Mount Rack 4U Size, with acrylic Fiber glass door, lock and key, with PDU	500mm	350mm

Company Name:

CP PLUS (Aditya Infotech Ltd.)

F-28 Okhla Industrial Area, Phase 1,

New Delhi - 110020, INDIA

Contact Mail ID :- customercare@cpplusworld.com

CE FC RoHS ONVIF

*Product casing and specifications are subject to change without prior notice

Cat6, 4 Pair UTP Cable

Feature	
Material	CCA
Nominal Conductor Diameter	0.50mm
Insulation Material	HDPE
No. of strands	1 nos (nom)
Thickness of insulation	0.20 mm (nom)
Jacket Material	PVC
Color	Green - White/ Green Brown - White/ Brown & Orange - White/ Orange
Dielectric Strength	12.50 N/sq.mm (min)
Rip Cord	Nylone
Insulation Dia (Nominal)	0.90mm +/- .03mm
Material PVC	Polyethylene
Elongation	300% (min)
Colour of Cables	Grey
Elongation at break	150% (min)
Outer Dia	5.70mm $\pm$ 0.03mm
Length	305 Mtr.
Cable Weight	7.900 Kg +/- 0.2kg
Tensile	17.50 N/sq. mm (min)
Thickness of Outer Jacket	0.60 $\pm$ 0.05 mm

Published Date -27-11-2025

Company Name:

CP PLUS (Aditya Infotech Ltd.)

F-28 Okhla Industrial Area, Phase 1,

New Delhi 110020, INDIA

Contact Mail ID :- customercare@cpplusworld.com

CE FC  Onvif

*Product casing and specifications are subject to change without prior notice

id	Lenovo
Screen Size	21.5"
Panel Type	In-Plane Switching
Resolution	1920 x 1080
Refresh Rate	48 Hz - 75 Hz for HDMI, 48 Hz - 60 Hz for VGA
Response Time	5 ms (Extreme mode), 8 ms (Normal mode)
Contrast Ratio	1300:1
Color Coverage	72% NTSC
Color Depth	8-bit
Color Support	16.7 Million
Backlight	WLED
Connection Type	1 x HDMI 1.4* (*Supports 1920 x 1080 @75 Hz as specified in HDMI1.4), 1 x VGA* (*Supports 1920 x 1080 @75 Hz), 1 x Audio Out (3.5 mm)
Brightness	250 cd/m ²
Aspect Ratio	16:9
Maximum Resolution	1920 x 1080
Mechanical	
Stand	Tilt Angle (-5° / 25°)
Viewing Angle	178° / 178°
Near Edgeless	3-side NearEdgeless
Dimension	
Head only Dimensions	489.4 mm x 53.3 mm x 291.5 mm / 12.27" x 2.10" x 11.48"
Weight Head Only	2.2 kg, 4.9 lb
Weight with Package	4.1 kg, 9.0 lb



16Ch. 5M-N/1080P Digital Video Recorder

	Specification
Processor	Embedded processor
Operating System	Embedded LINUX
Video Input	16 channel, BNC
IP Camera Input	16+8ch. (analog channels are converted into IP channels), each channel up to 6MP
Analog Camera Input	16 channels, BNC; adaptive access by default; HDCVI, AHD, TVI and CVBS access can be configured
Camera Input	1. CVI: 5MP, 4MP, 1080p@25/30 fps, 720p@50/60 fps, 720p@25/30 fps. 2. TVI: 5MP, 4MP, 3MP, 1080p@25/30, 720p@25/30 fps. 3. AHD: 5MP, 4MP, 3MP, 1080p@25/30, 720p@25/30 fps.
Perimeter Performance AI by DVR (Number of Ch.)	Advanced Model: 2 channel, 10 IVS for each channel General Model: 4 channels, 10 IVS for each channel
Face Attributes	6 attributes: Gender, age groups (6), glasses, expressions (8), face mask, beard, with up to four detection panels displayed at the same time
Face Detection Performance of AI By DVR (Number of Ch.)	2 channels, and a single channel can detect up to 12 faces
Face Database Capacity	Up to 10 face databases and 10,000 pictures in total. Name, gender, birthday, address, certificate type, certificate No., countries & regions and state can be added to each face picture
Face Recognition Performance of AI By DVR (Number Of Ch.)	2ch.
SMD Plus by Recorder	Full-channel SMD Plus (AI by recorder), secondary filtering for human and motor vehicle SMD Plus, reducing false alarms caused by leaves, rain and lighting condition change
Multi Screen Preview	When IP extension mode not enabled: 1/4/8/9/16 When IP extension mode enabled: 1/4/8/9/16/25



*Product casing and specifications are subject to change without prior notice

Feature	Specification
Compression	H.265/ H.264+ / H.264
Video Resolution	1 HDMI, 1 VGA VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 It changes to 1920 × 1080, 1280 × 1024, 1280 × 720 when Face or IVS&SMD is selected in AI Mode
Video Frame Rate	PAL: 1 fps~25 fps NTSC: 1 fps~30 fps
Encode Strategy	AI Instastream, Instastream
Network Mode	Single-address mode
Encoding Capacity	All channel 5M-N (1 fps~10 fps); 4M-N/1080p (1 fps~15 fps); 1080N/720p/960H/D1/CIF (1 fps~25/30 fps)
Stream Capability	Dual-stream (D1/CIF (1 fps~15 fps)
Bit Rate	32 Kbps~6144 Kbps Per Channel
Bit Rate Type	Video stream and composite stream
Audio Compression	G.711A; G.711U; PCM
Audio Input	1Ch. RCA (external), 16Ch. BNC (coaxial)
Audio Output	1Ch. RCA
Audio Sample Rate	8 KHz, 16 bit per channel
Two-way Talk	Yes (share the same audio input with the first channel)
Audio Bit Rate	64 kbps per channel
Browser	Chrome, IE9 or above, Firefox
User Interface	GUI, Web
Smart Phone	iPhone, iPad, Android Phone
Disk Group	Yes
Hard Disk	2 SATA Ports, up to 16TB for a single HDD, the maximum HDD capacity varies with environment temperature
General Alarm	Motion detection, Video Loss, tampering, and local alarm
Anomaly Alarm	No disk, disk error, low space, offline, ip conflict, MAC conflict
Intelligent Alarm	Face detection, face recognition, perimeter protection

8Ch. 1080N Digital Video Recorder

1

Processor	Embedded processor
Operating System	Embedded LINUX
IP Camera Input	8+2 channels; each channel up to 6MP
Two-way Talk	Reuse audio in/out, RCA
User Interface	GUI
Video Input	8 channel, BNC
Video Output	1 HDMI, 1 VGA
Video Compression	Instastream/H.265/H.264+/H.264
Video Resolution	1920×1080, 1280×1024, 1280×720, 1024×768
Resolution	1080N, 720P, 960H, D1, HD1, BCIF, CIF, QCIF
Video Recording	Main Stream: the 1st channel 1080N/720P(1~25/30fps), others 1080N/720P(1~15fps); 960H/D1/CIF(1~25/30fps); Sub stream: CIF/QCIF (1~7fps)
Video Display Split	1/4/8/9
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Bit Rate	32 kbps~4096 kbps per channel
Audio Compression	G.711A, G.711U, PCM
Audio Input	1 channel, RCA
Audio Output	1 channel, RCA
Audio Sample Rate	8KHz, 16 bit Per Channel
Audio Bit Rate	64Kbps Per Channel
Motion Detection	Support
Video Loss	Support
Camera Blank	Support
Smart Phone	iPhone, iPad, Android Phone
Hard Disk	1 SATA port, up to 6TB capacity
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips

ASIA 2 WORLD 4

CE FCC RoHS ONVIF

*Product casing and specifications are subject to change without prior notice

Feature	
Alarm Input	N/A
Alarm Output	N/A
Recording Mode	Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering); Alarm, Stop
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second)
Playback	1/4/9 Ch.
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup, selection, Digital zoom
Backup Mode	USB Device
Interface Ports	2 USB Ports (USB 2.0)
Max User Access	128 users
Record Interval	1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
Ethernet	1 RJ-45 port (100Mbps)
Protocols	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; RTSP; UDP; SMTP; NTP; DHCP; DNS; IP Filter; DDNS; FTP; Alarm Server; InstaOn; IP Search, ONVIF 1.6, 1.2, CGI Conformance
Power Supply	DC12V/1.5A
Power Consumption	<10W (without HDD)
Working Temp	-10°C ~ +45°C (+14°F ~ +113°F), 10 ~ 90% (RH)
Storage Temp	-20°C ~ +70°C (-4°F ~ +158°F), 0 ~ 90% (RH)
Dimensions	198 mm × 202.9 mm × 41.5 mm
Weight	0.55kg (without HDD)

Feature	Specification
Alarm Linkage	Record, Snapshot (panoramic), IPC external alarm output, access controller, voice prompt, buzzer, log, Preset, email
Recording Mode	Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Recording Playback	1/4/9/16, It changes to 1/4/9 split when Face or IVS & SMD is selected in AI Mode.
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup, selection, Digital zoom
Backup Mode	USB Device/ Network
Record Interval	1 min-60 min (default: 60 min), Pre-record: 1 sec-30 sec, Post-record: 10 sec-300 sec
Interface Ports	2 USB Ports (1 USB 2.0, 1 USB 3.0), 1 RS485, 1 RS232(optional)
Ethernet	1 RJ-45 Port (10/100/1000 Mbps)
Protocols	HTTP, HTTPS, TCP / IP, IPv4, RTSP, UDP, SMTP, NTP, DHCP, DNS, DDNS, ONVIF 21.06, CGI Conformance, Instaon
Power Supply	DC 12V/4A
Power Consumption	<12W
Working Temp	-10°C to +55°C (+14°F to +131°F)
Working Humidity	10%-90%
Dimensions	375mm×289mm×53 mm (W×D×H)
Weight	1.56kg

Company Name:

CP PLUS (Aditya Infotech Ltd.)

F-28 Okhla Industrial Area, Phase 1,

New Delhi 110020, INDIA

Contact Mail ID :- customercare@cpplusworld.com



*Product casing and specifications are subject to change without prior notice